



Grace Care series

D3d

THREE FUNCTIONS MANUAL BED

Registration code: SK-CD1




Healthward^{uk}

Healthier
your life


D3d

FEATURES AND HIGHLIGHTS

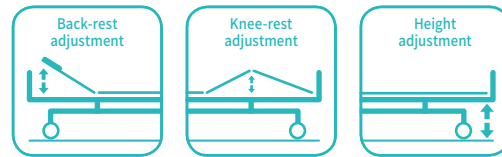

Technical parameters

▪ External size (LxWxH)	2245x1090x435-745 mm
▪ Mattress platform	1925x900 mm
▪ Safe working load	250 kg
▪ Back-rest adjustment	0-75° (±10°)
▪ Knee-rest adjustment	0-35° (±10°)

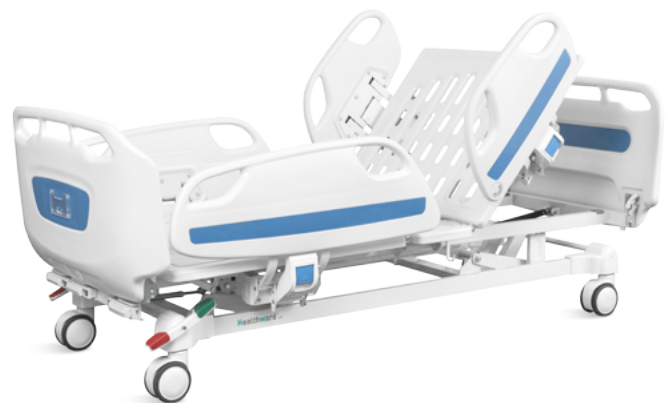

Technical configuration

<input checked="" type="checkbox"/> Manual Cranks	3pcs
<input checked="" type="checkbox"/> 5" Double Side Castors, Central Locking	4pcs
<input checked="" type="checkbox"/> ABS Grace Side Rail Extra Height	1set
<input checked="" type="checkbox"/> ABS Grace Bed Ends with Safe Lock	1set
<input checked="" type="checkbox"/> Central Locking Pedal	2pcs
<input checked="" type="checkbox"/> IV Pole	1set
<input checked="" type="checkbox"/> IV Pole Prevision	4pcs
<input checked="" type="checkbox"/> Drainage Hook	2pcs




Optional

<input type="checkbox"/> Monkey Pole	
<input type="checkbox"/> Balkan Traction Frame	
<input type="checkbox"/> Directional Wheel	



Design

Extra long and height head foot board, with curve surrounded design, provide comforting feeling for patients.



Plastic

Environmental plastic can be sterilized in 100°C, tensile upto 30MPa Virgin ABS material.



Steels | Painting

Baosteel from Fortune Global 500 11 Process epoxy painting, ASTM testing anti-bacterial, paint thickness 0.12 mm, brightness 60°, paint can resist 50 kg impact.



Welding | Chassis

Panasonic robotic ensure, 360° full smooth wedding Solid bed base made of 5.0 mm stamped rotating plate.



Hand Control

Retractable hand crank, 100,000 times remaining intact Extreme protection device, sounds when tipped to the max position, Strong pallets to increase the bed height adjustment (435-745mm).



Platform

Stamping forming platform, smooth surface no welding scar, bearing 250KG load. Option resin X-ray translucent platform.



Guardrail

Tuck away side rail with angle indicator.



Head & Foot Board

Head and foot board can be reversable, extra height design, size: 1000*563mm; ABS Grace Bed Ends with Safe Lock, automatic lock without any manual operation on lock, on/off removable mark on hook lock.



Wheels

TPR tire no worn out after running 30 km, save anti-winding hard shell, united forming without bolts. Pass dynamic test: Bearing 120 kg, run 30 km and pass obstacles 500 time.



Durable Brakes

Break spring keep qualified after 10,000 times uninteruped break.



Angle Indicator

Patented angle indicator.



Drainage Hooks

Mobile plastic drainage hooks.



IV pole

Stainless Steel Column with plastic hook.





CONSTANT INNOVATION



Design



Research



Manufacturing



Maintenance



Service



WORLDWIDE BRANCHES

USA

Saikang Medical Technology, Inc.
17800 Castleton St Ste 180,
City of Industry, 91748, California.
Tel.: +1 949648 2776

United Kingdom

UK Healthward International Ltd.
Dept. 111, 196 High Road Wood
Green, N22 8HH, London.
Tel.: +44 2032399738

Russia

Saikang Medical Russia LLC
Truda 174,
454080 Chelyabinsk.
Tel.: +7 (351) 214 5566 / 8811 / 1516

East Africa

Saikang Medical Solutions Ltd.
Viraj Complex Unit 3, Mombasa
Road, P.O. Box 14262-00800, Nairobi.
Kenya.
Tel.: +254 733 704 690

Middle East

Saikang Medical Supplies LLC
X22-S03 England Cluster,
International City, Dubai,
United Arab Emirates.
Tel.: +20 128 8962497

Healthward^{uk}

Chengdu Saikang Medical Equipment Co., Ltd.
STOCK CODE: 870098

📍 No.1, 5th Floor, Building 5, No.360, Wuke West 5th Road ·
Wuhou District (Chengdu) · China

☎️ +86 18021231901 · 🌐 24/7

✉️ export@health-ward.com

🌐 www.health-ward.com



Company video



General catalogue